

FROULICT DATA SHEET



UMNI-DIRECTIONAL MOUNT



PRD Features:

- 1) High strength, glass-filled nylon construction
- 2) Approximately 5.25" tall (when positioned at 90°), 4.25" wide face plates
- 3) Weather and UV resistant
- 4) Allows wires to easily pass through center
- 5) 360° x 180° mounting angles
- 6) No RFID interference
- 7) Made in the USA
- 8) Perfect for mounting cameras, long range readers, and other devices
- 9) Fully Assembled—Includes mounting hardware
- 10) Mount to any surface pedestals, walls, parapets, etc.

Description:

A strong but simple omni-directional mount for cameras, long range readers, housings, etc. Designed to allow an installer to achieve 360° x 180° mounting angles by combining two rotating hemispheres from any surface -- pedestals, walls, parapets, etc. Injection molded using glass filled Nylon (black) with very high strength and weatherability (including UV) without interfering with RFID systems. Configured to allow wires to pass through its center "eye" to protect camera and card reader connectivity from vandals and weather. Approximately 5.25" tall (when positioned at 90°) and 4.25" wide face plates; 1.75" long mounting slots for 1/4" carriage bolts set on a 3.375" circle.


Omni-Directional Mount

Model # Omni-4W5T-BLK







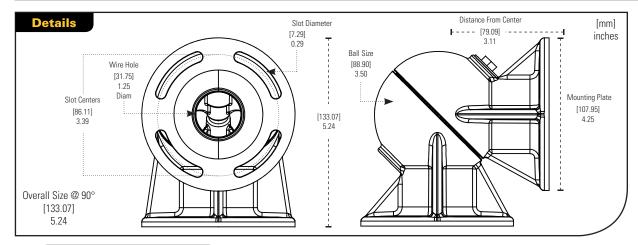















^{*} Includes mounting hardware