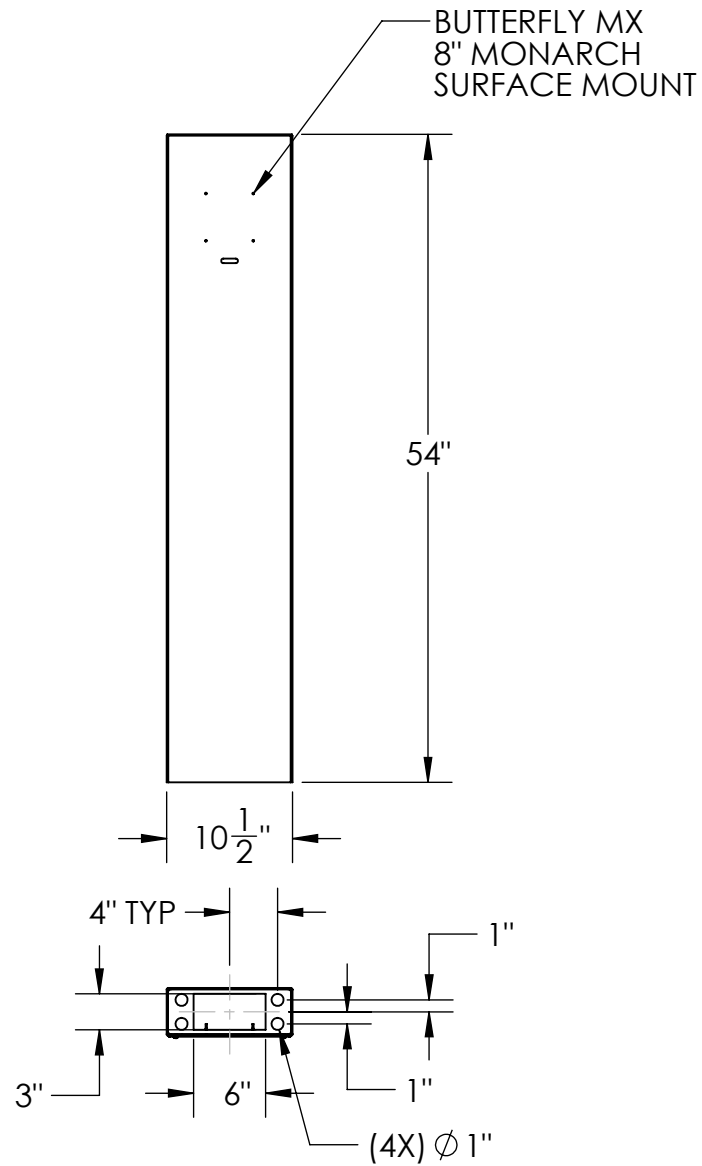


- NOTES:
1. MATERIAL OF CONSTRUCTION IS 304 SS, BRUSHED #4.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE
A

PART NO.

104CAB-BUT-01-304


REV
0

WEIGHT:

NO SCALE

SHEET 1 OF 9

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	104CAB-BUT-01-304 MAIN BODY	304SS TOWER WELDMENT	1
2	104CAB-BUT-01-304 ACCESS DOOR	ACCESS DOOR	1
6	--	8-32 SS BUTTON HEAD SCREW	10
7	--	316 Stainless Steel Ultra-Low-Profile Socket Head Screw 8-32 X 5/16"	4

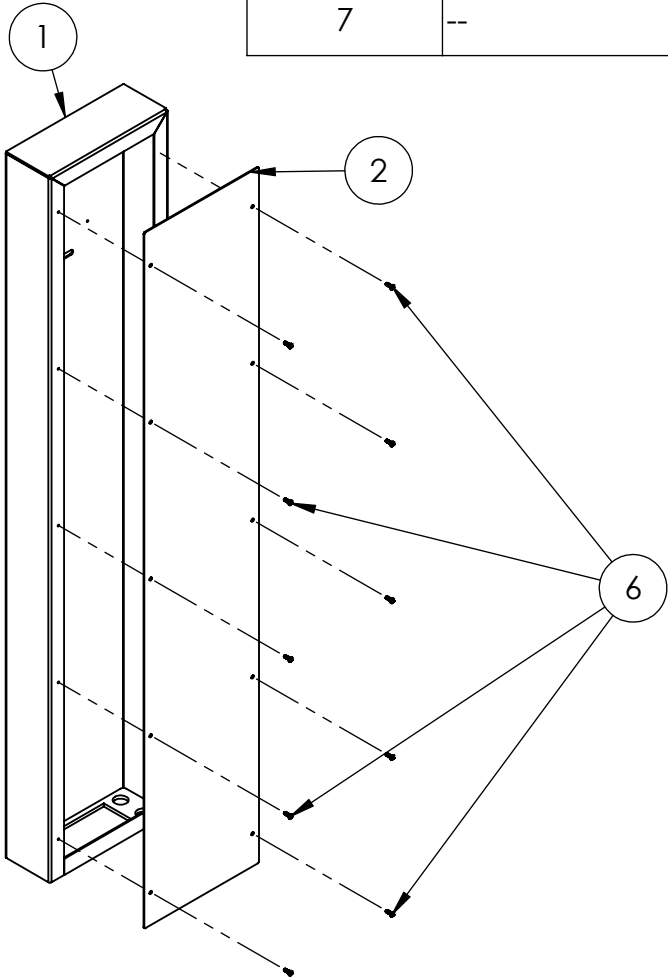

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

FRACTIONAL $\pm 1/32$

ANGULAR: $\pm 2^\circ$

TWO PLACE DECIMAL ± 0.010

THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009

	NAME	DATE
DRAWN		
CHECKED		

TITLE:			104CAB-BUT-01-304		
		SIZE	PART NO.	REV	
		A	ASSEMBLY	0	
WEIGHT:		NO SCALE		SHEET 2 OF 9	