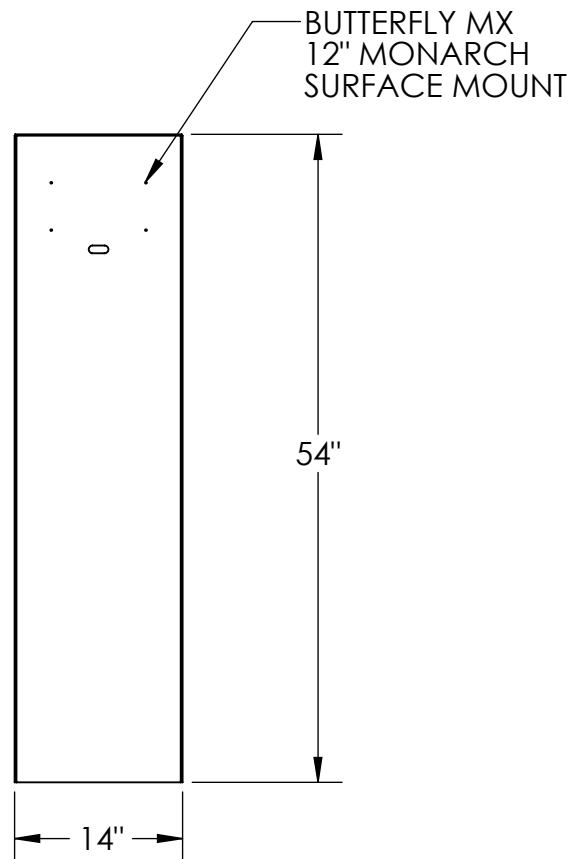


NOTES:  
1. MATERIAL OF CONSTRUCTION IS 304 SS, BRUSHED #4.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

DRAWN

NAME

DATE

CHECKED

TITLE:

INSTALLATION

SIZE  
**A**

PART NO.  
144CAB-BUT-01-304


REV  
**0**

WEIGHT:

NO SCALE

SHEET 1 OF 9

| ITEM NO. | PART NUMBER                   | DESCRIPTION                                                          | QTY. |
|----------|-------------------------------|----------------------------------------------------------------------|------|
| 1        | 144CAB-BUT-01-304 MAIN BODY   | 304SS TOWER WELDMENT                                                 | 1    |
| 2        | 144CAB-BUT-01-304 ACCESS DOOR | ACCESS DOOR                                                          | 1    |
| 6        | --                            | 8-32 SS BUTTON HEAD SCREW                                            | 10   |
| 7        | --                            | 316 Stainless Steel Ultra-Low-Profile Socket Head Screw 8-32 X 5/16" | 4    |

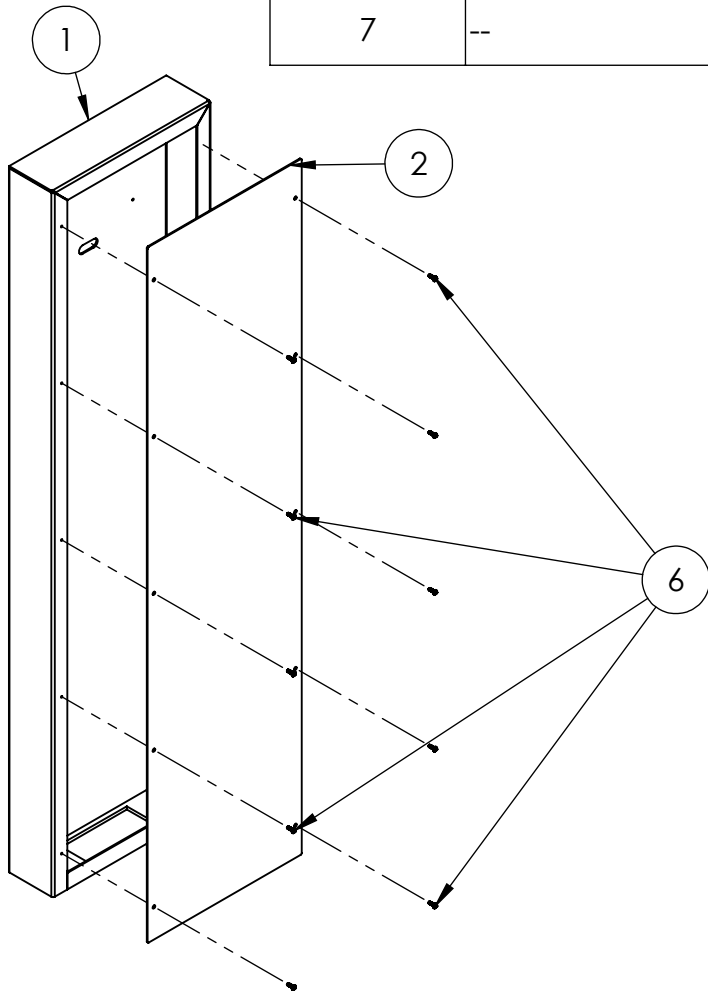

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

|         | NAME | DATE |
|---------|------|------|
| DRAWN   |      |      |
| CHECKED |      |      |

TITLE:

144CAB-BUT-01-304

|         |                  |                      |                 |
|---------|------------------|----------------------|-----------------|
|         | SIZE<br><b>A</b> | PART NO.<br>ASSEMBLY | REV<br><b>0</b> |
| WEIGHT: | NO SCALE         | SHEET 2 OF 9         |                 |