


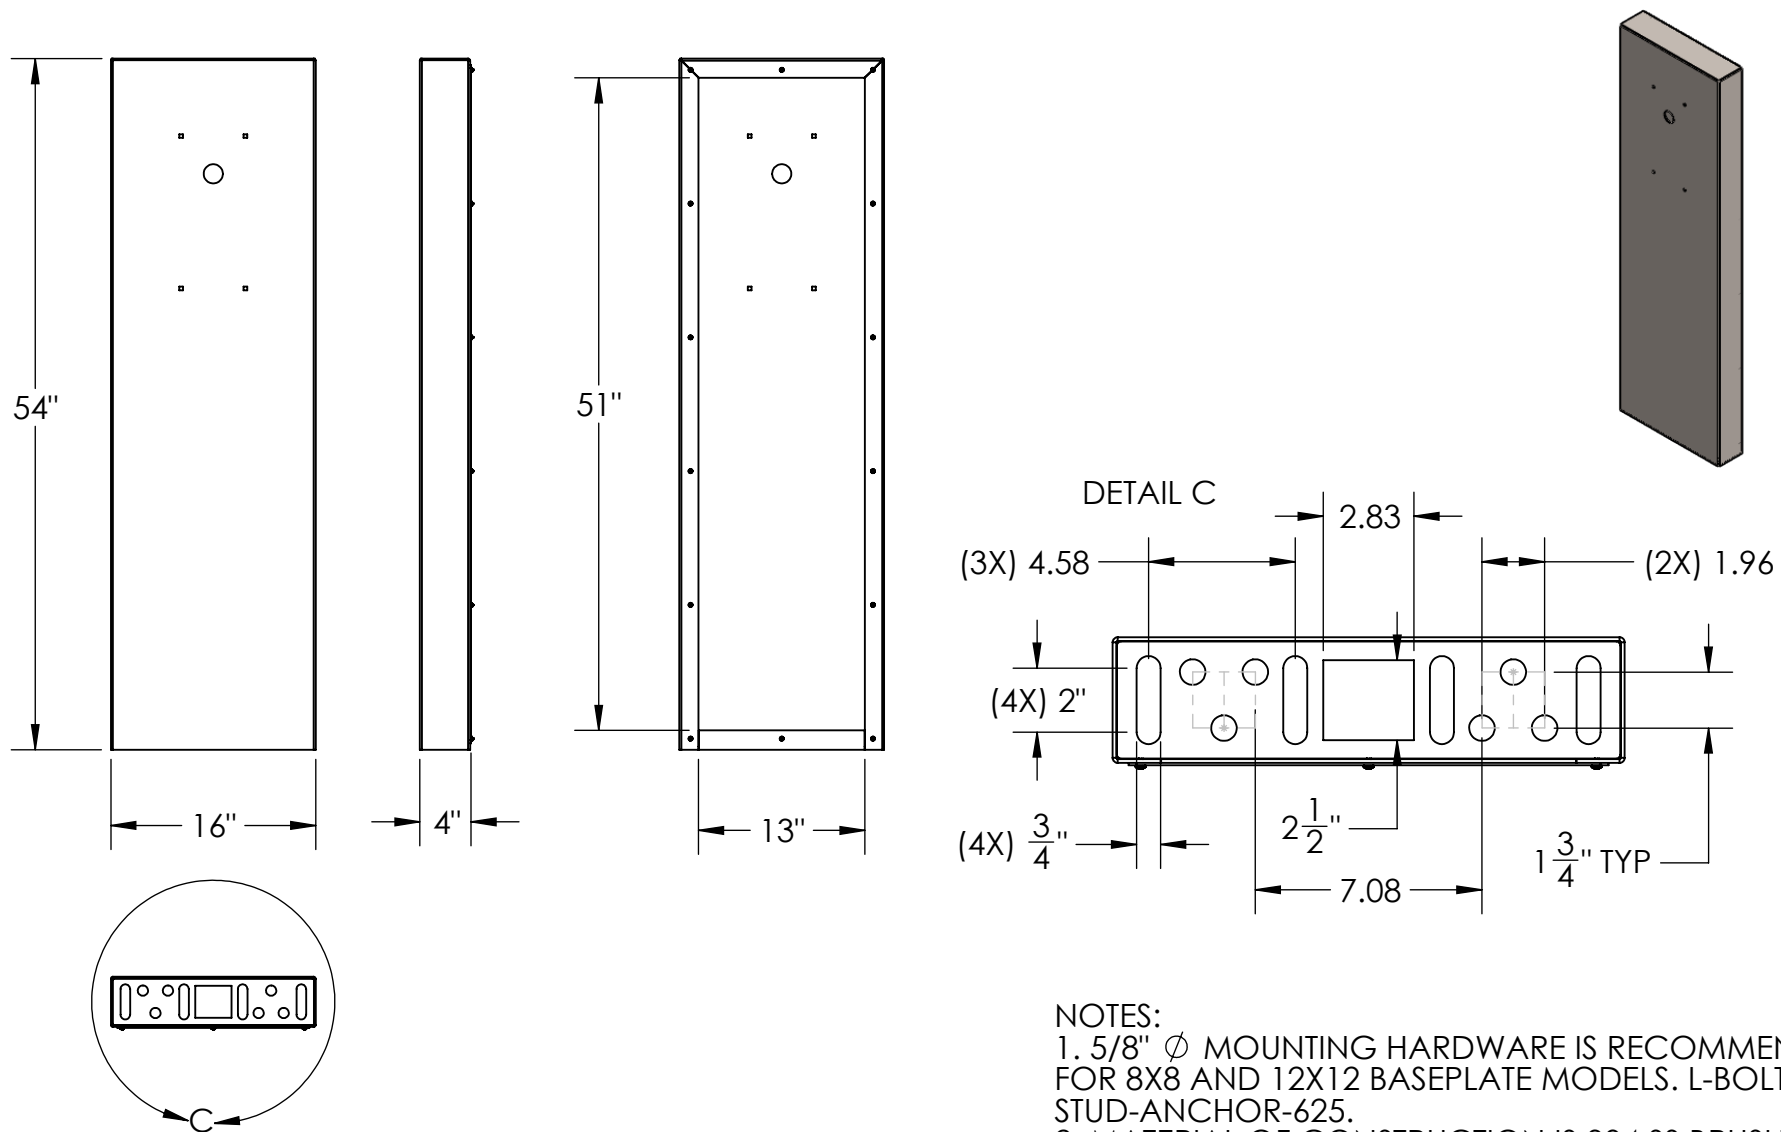

NOTES:  
 1. 5/8"  $\phi$  MOUNTING HARDWARE IS RECOMMENDED FOR 8X8 AND 12X12 BASEPLATE MODELS. L-BOLT-625, STUD-ANCHOR-625.  
 2. MATERIAL OF CONSTRUCTION IS 304 SS BRUSHED #4 FINISH.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL  $\pm 1/32$   
 ANGULAR:  $\pm 2^\circ$   
 TWO PLACE DECIMAL  $\pm 0.010$   
 THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
 TOLERANCING PER:  
 ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE  
**A**

PART NO.


164TOW-XLG-001-304

REV  
**0**

WEIGHT:

NO SCALE

SHEET 1 OF 7

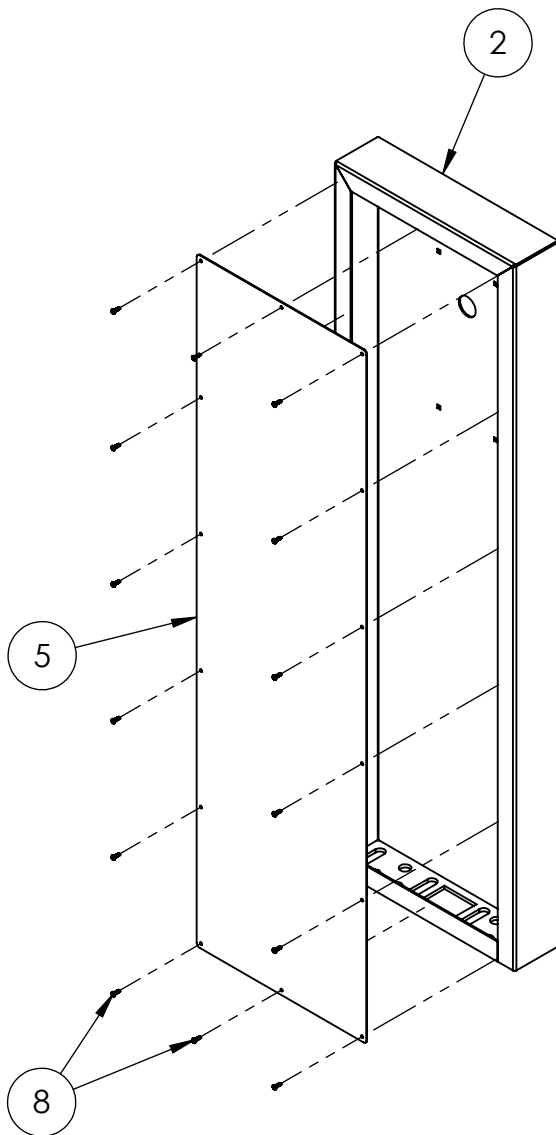

| ITEM NO. | PART NUMBER             | DESCRIPTION              | QTY. |
|----------|-------------------------|--------------------------|------|
| 6        | 164TOW-XLG-001-304 BODY | 304 SS BODY WELDMENT     | 1    |
| 7        | PLTACC-1654             | ACCESS PANEL WELDMENT    | 1    |
| 8        | ---                     | 8-32 x .5 PAN HEAD SCREW | 14   |

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

|         | NAME | DATE |
|---------|------|------|
| DRAWN   |      |      |
| CHECKED |      |      |

TITLE:

ASSEMBLY

WEIGHT:

SIZE  
**A**

PART NO.  
164TOW-XLG-001-304

REV  
**0**

NO SCALE

SHEET 2 OF 7