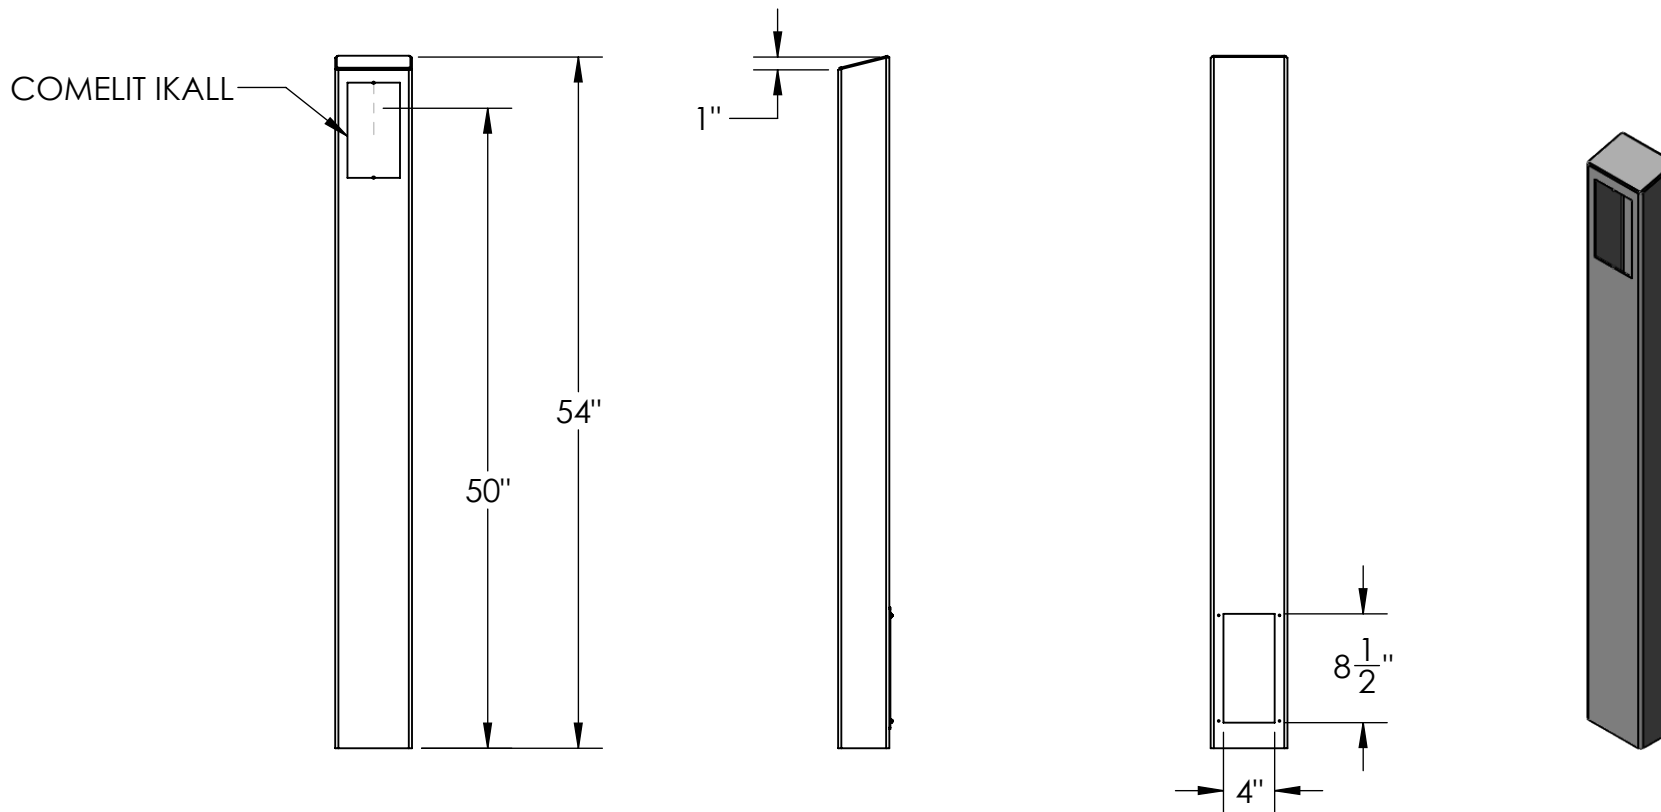


#### NOTES:

1. 1/2"  $\phi$  MOUNTING HARDWARE IS RECOMMENDED FOR 5X5 BASEPLATE AND STAINLESS TOWER MODELS. L-BOLT-500, STUD-ANCHOR-500.
2. 5/8"  $\phi$  MOUNTING HARDWARE IS RECOMMENDED FOR 8X8 BASEPLATE, 12X12 BASEPLATE, AND BOLLARD STYLE BASEPLATE MODELS. L-BOLT-625, STUD-ANCHOR-625.
3. MATERIAL OF CONSTRUCTION IS 304SS BRUSHED #4 FINISH.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

NAME DATE

DRAWN

CHECKED

TITLE:

INSTALLATION

SIZE  
**A**

PART NO.  
64TOW-COM-002-304


REV  
**B**

WEIGHT:

NO SCALE

SHEET 1 OF 7

| ITEM NO. | PART NUMBER       | DESCRIPTION                   | QTY. |
|----------|-------------------|-------------------------------|------|
| 1        | 64TOW-COM-002-304 | 304SS BODY                    | 1    |
| 2        | PLTACC-610        | 304SS STND 4X8.5 ACCESS COVER | 1    |
| 3        | --                | 8-32X5/8 SS BUTTON HEAD SCREW | 4    |

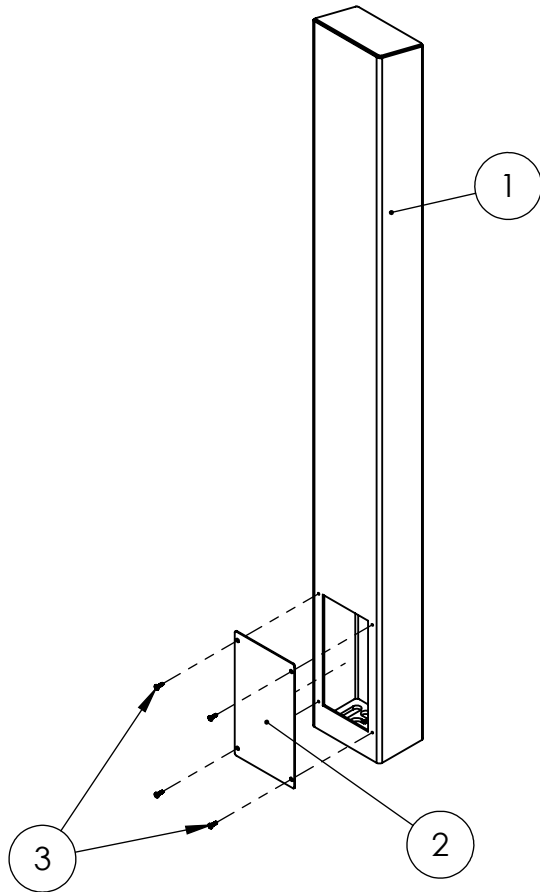

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

|         | NAME | DATE |
|---------|------|------|
| DRAWN   |      |      |
| CHECKED |      |      |

TITLE:

ASSEMBLY

|         |                  |                               |                 |
|---------|------------------|-------------------------------|-----------------|
|         | SIZE<br><b>A</b> | PART NO.<br>64TOW-COM-002-304 | REV<br><b>B</b> |
| WEIGHT: | NO SCALE         | SHEET 2 OF 7                  |                 |