
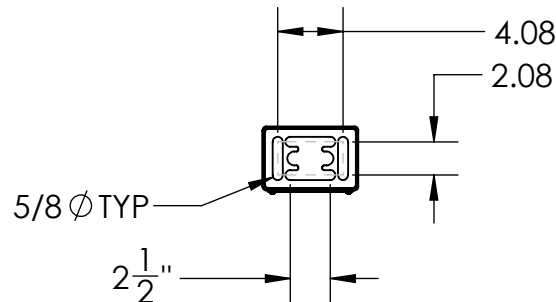
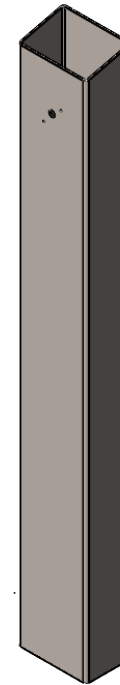
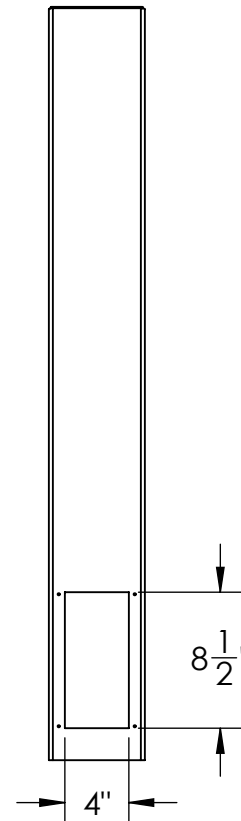
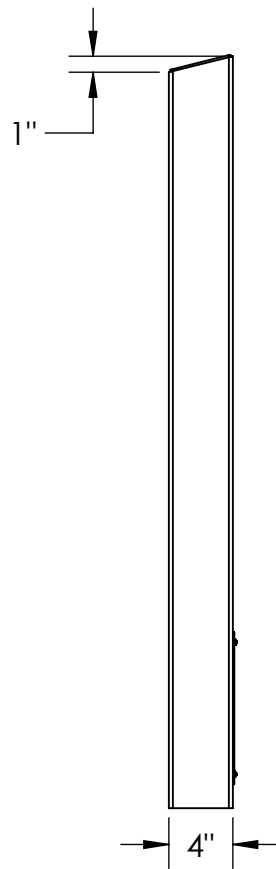


PAXTON E50 EXIT BUTTONS  
(356-310-US)

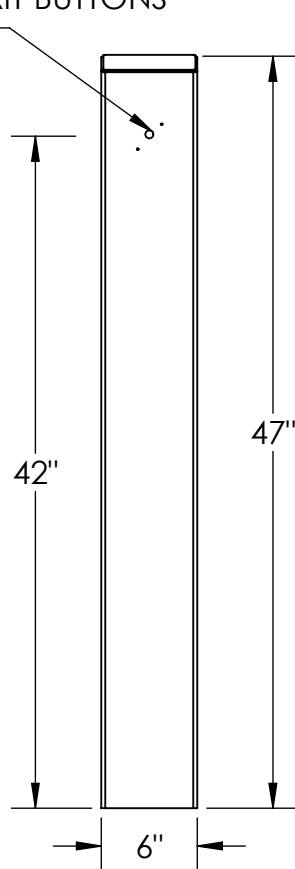

NOTES:

1. 1/2" Ø MOUNTING HARDWARE IS RECOMMENDED FOR 5X5 BASEPLATE AND STAINLESS TOWER MODELS. L-BOLT-500, STUD-ANCHOR-500.
2. 5/8" Ø MOUNTING HARDWARE IS RECOMMENDED FOR 8X8 BASEPLATE, 12X12 BASEPLATE, AND BOLLARD STYLE BASEPLATE MODELS. L-BOLT-625, STUD-ANCHOR-625.
3. MATERIAL OF CONSTRUCTION IS 304SS BRUSHED #4 FINISH.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL:  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE  
**A**

PART NO.  
64TOW-PAXT-10-304


REV  
**B**

WEIGHT:

NO SCALE

SHEET 1 OF 7

| ITEM NO. | PART NUMBER            | DESCRIPTION                  | QTY. |
|----------|------------------------|------------------------------|------|
| 1        | 64TOW-PAXT-10-304 TUBE | TOWER WELDMENT               | 1    |
| 2        | PLTACC-510             | STND 5.25 X 8.5 ACCESS COVER | 1    |
| 3        | --                     | 8-32 SS BUTTON HEAD SCREW    | 4    |

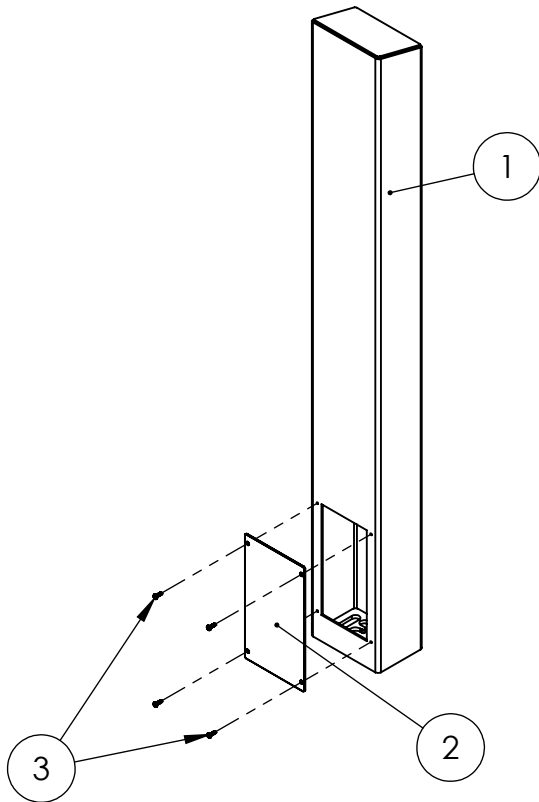

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

|         |      |      |
|---------|------|------|
|         | NAME | DATE |
| DRAWN   |      |      |
| CHECKED |      |      |

TITLE:

ASSEMBLY

WEIGHT:

SIZE  
**A**

PART NO.  
64TOW-PAXT-10-304

REV  
**B**

NO SCALE

SHEET 2 OF 7