

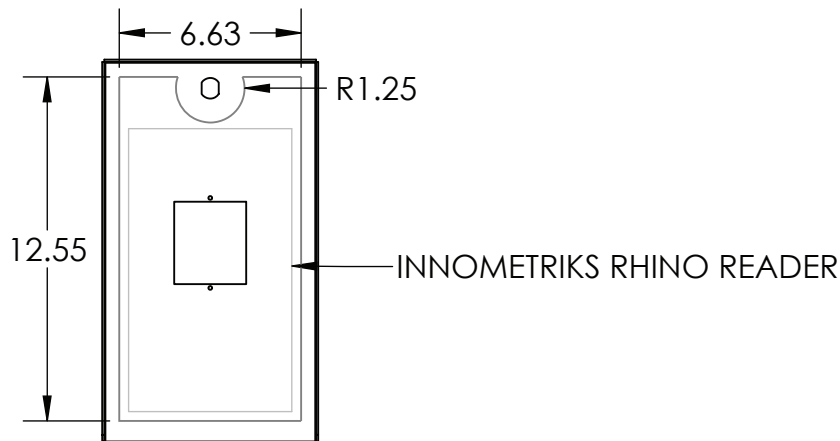
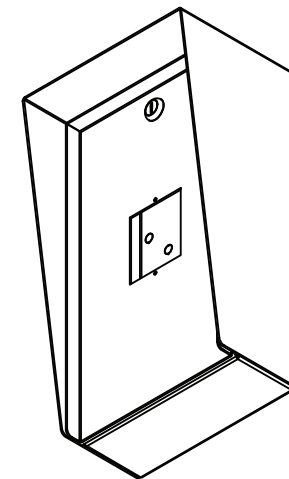
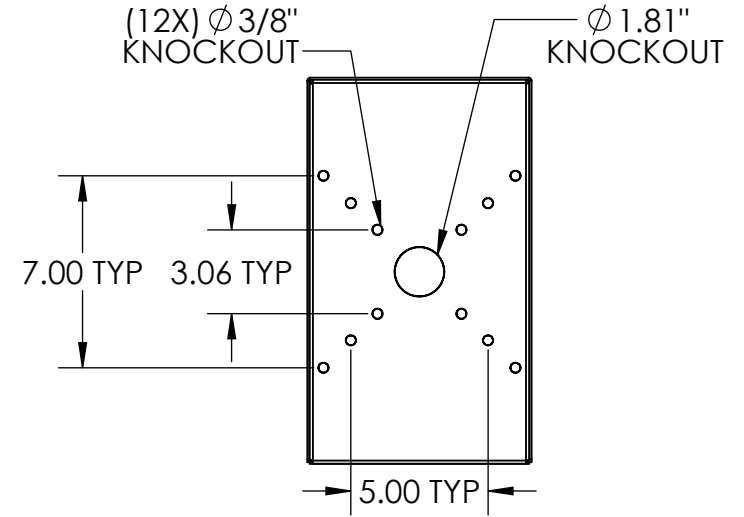
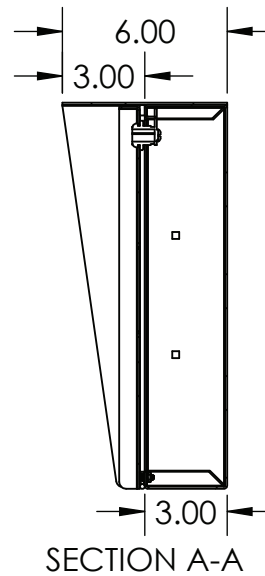


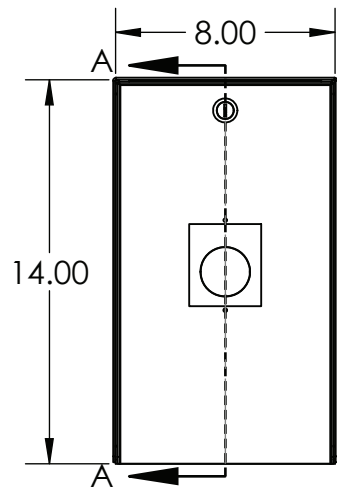

AVAILABLE CUTOUT AREA


- NOTES:
1. MATERIAL OF CONSTRUCTION IS MILD STEEL.
 2. 2-4 MILS BLACK WRINKLE POWDER COAT.
 1. PWDR-BLACK-WRINKLE



UNLESS OTHERWISE SPECIFIED: ★	NAME	DATE
DIMENSIONS ARE IN INCHES	DRAWN	PE
TOLERANCES:	CHECKED	
FRACTIONAL: $\pm 1/32$	PROPRIETARY AND CONFIDENTIAL	
ANGULAR: $\pm 2^\circ$	THE INFORMATION CONTAINED IN THIS	
TWO PLACE DECIMAL ± 0.010	DRAWING IS THE SOLE PROPERTY OF	
THREE PLACE DECIMAL ± 0.005	PEDESTALPRO LLC. ANY REPRODUCTION	
INTERPRET GEOMETRIC	IN PART OR AS A WHOLE WITHOUT THE	
TOLERANCING PER:	WRITTEN PERMISSION OF PEDESTALPRO LLC	
ASME Y14.5 -2009	IS PROHIBITED.	

TITLE:	INSTALLATION		
Wednesday, November 26, 2025 10:02:13 AM	SIZE A	PART NO. 814HOU-INNO-01-CRS	REV C
WEIGHT: 12.254	NO SCALE		SHEET 1 OF 6

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	814HOU-INNO-01-CRS ENCLOSURE	ENCLOSURE WELDMENT	1
2	814HOU-INNO-01-CRS DOOR	DOOR WELDMENT	1
3	814HOU-INNO-01-CRS HOOD	HOOD	1
4	HINGE	PIANO HINGE	1
5	CAM LOCK	STRAIGHT CAM	1
6	GASKET SIDE	3/8" X .150 WEATHERSTRIPPING	2
7	GASKET TOP	3/8" X .150 WEATHERSTRIPPING	1
8	--	6-32 PAN HEAD SCREW	4
9	--	6-32 EXTERNAL TOOTH LOCK NUT	4

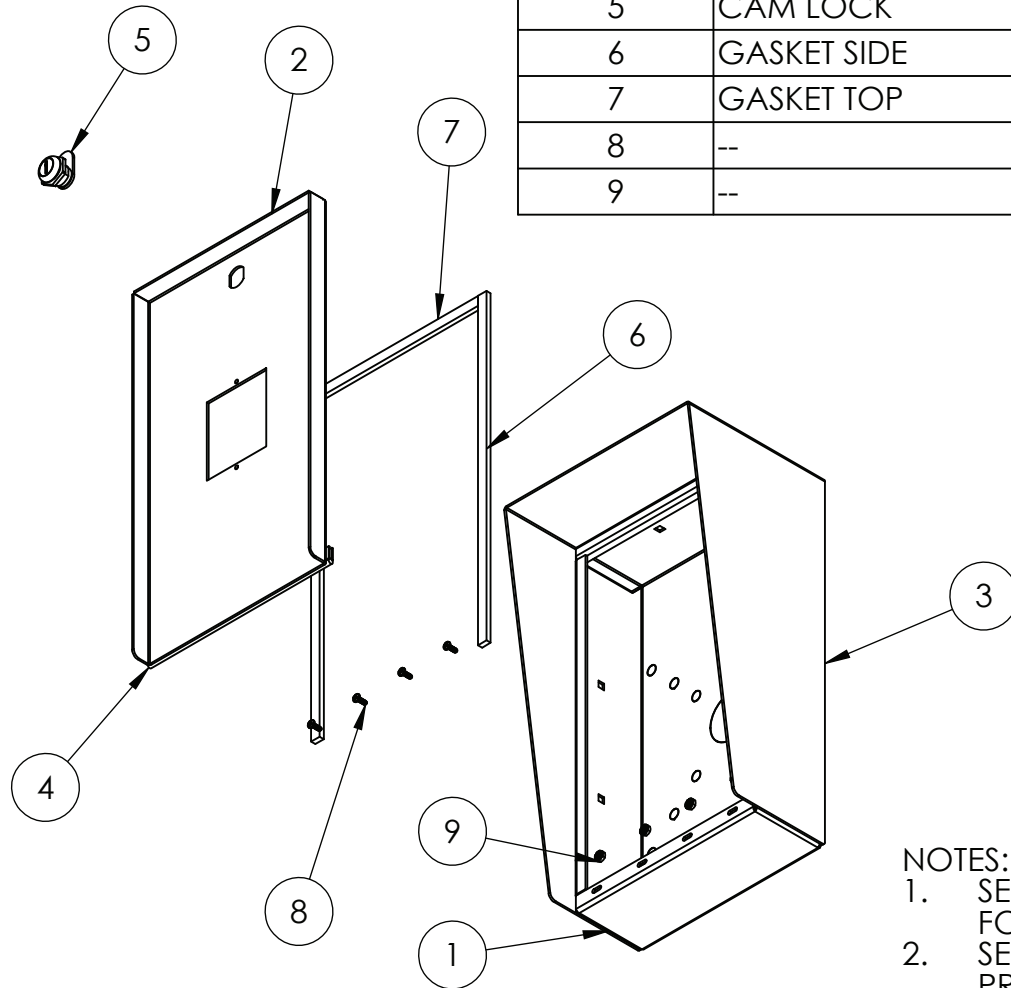

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

DRAWN

CHECKED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PEDESTALPRO LLC. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF PEDESTALPRO LLC
IS PROHIBITED.

NAME

DATE

TITLE:

ASSEMBLY

Wednesday, November 26,
2025 10:02:13 AM

WEIGHT: 12.254

SIZE
A

PART NO.
814HOU-INNO-01-CRS

REV
C

NO SCALE

SHEET 2 OF 6