

#### NOTES:

1. MATERIAL OF CONSTRUCTION IS MILD STEEL COATED IN 2-4 MILS OF BLACK WRINKLE POWDER COAT.
2. MOUNTS TO A STND 8" BASE PLATE AND WILL BREAK AWAY WHEN STUCK BY A VEHICLE.
3. TRIM BOLTS TO BE FLUSH WITH THEIR NUT AFTER INSTALL.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL:  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL:  $\pm 0.010$   
THREE PLACE DECIMAL:  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE  
**A**

PART NO.

88BRE-PRO-01-CRS


REV  
**0**

WEIGHT: 5.243

NO SCALE

SHEET 1 OF 5

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	PLTBAS-8-BRK-1	BREAK AWAY BASE BOTTOM PLATE	1
2	PLTBAS-8-BRK-2	BREAK AWY BASE TOP PLATE	1
3	88BRE-PRO-01-CRS TUBE	BREAK AWAY TUBE	1
4	--	5/8-11 X 1" NYLON HEX BOLT	4
5	--	5/8-11 NYLON HEX NUT	4

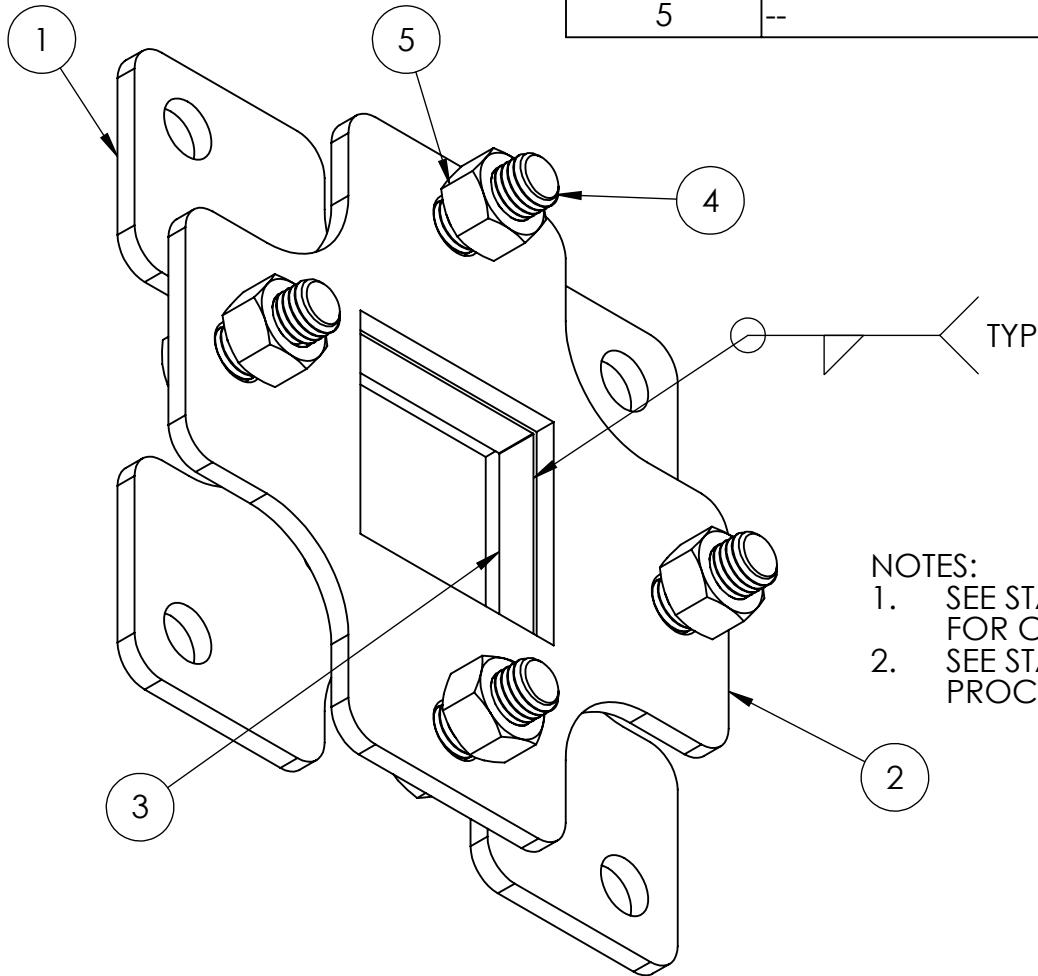

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL:  $\pm 1/32$   
ANGULAR:  $\pm 2^\circ$   
TWO PLACE DECIMAL  $\pm 0.010$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC  
TOLERANCING PER:  
ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

ASSEMBLY

SIZE  
**A**

PART NO.  
88BRE-PRO-01-CRS

REV  
**0**

WEIGHT: 5.243

NO SCALE

SHEET 2 OF 5