

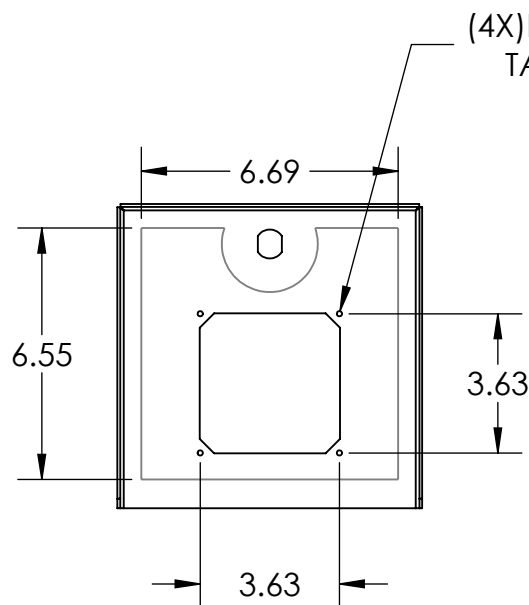
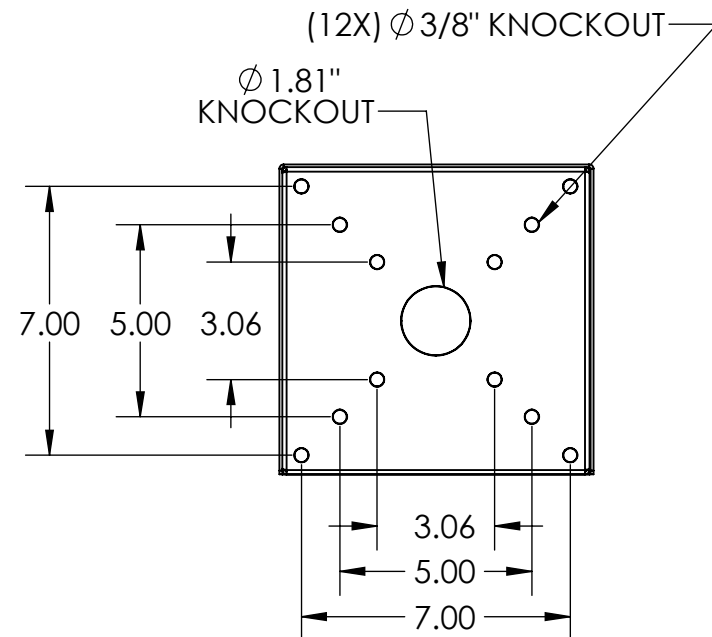
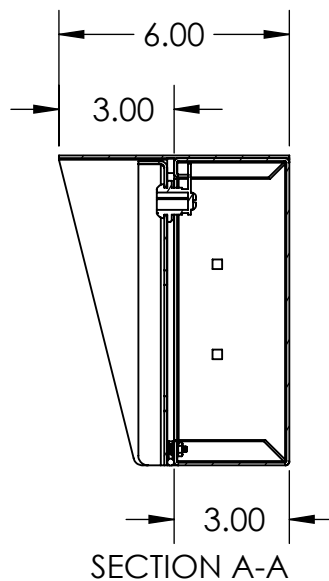


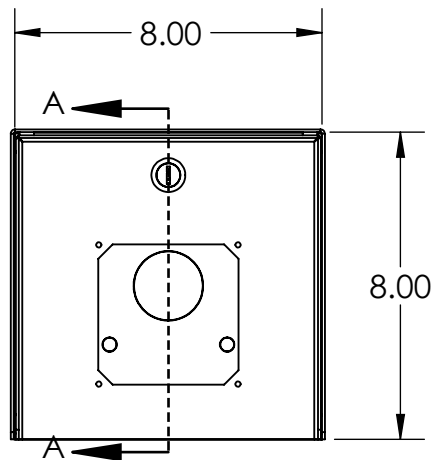

(4X)DRILL #29
TAP 8-32

VIKING CUTOUT FITS:

E-10A, E10A-EWP, E-10-IP, E-10-IP-EWP,
E-10-WHA, E-10-WHA-EWP, E-30, E-30-EWP,
E-30-IP, E-30-IP-EWP, E-30-PT, E-30-PT-EWP,
E-30TF-IP, E-30TF-IP-EWP, E-35, E-35-EWP,
E-35-IP, E-35-IP-EWP, E-1600-20A,
E-1600-20A-EWP, E-1600-20-IP, E-1600-20-IPEWP,
E-1600-30A, E-1600-30A-EWP, E-1600-30-IP,
E-1600-30-IPEWP, MSB-30, MSB-30-EWP, W-1000,
W-1000-EWP, W-3000, W-3000-EWP, W-3005,
W-3005-EWP

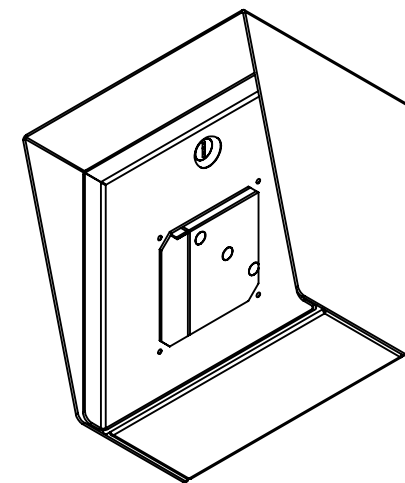

NOTES:

1. MATERIAL OF CONSTRUCTION IS MILD STEEL.
2. 2-4 MILS BLACK WRINKLE POWDER COAT. (8017-91612)

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE
A

PART NO.
88HOU-VIKI-01-CRS


REV
C

WEIGHT: 7.838

NO SCALE

SHEET 1 OF 6

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	88HOU-VIKI-01-CRS ENCLOSURE	ENCLOSURE WELDMENT	1
2	88HOU-VIKI-01-CRS DOOR	DOOR WELDMENT	1
3	88HOU-VIKI-01-CRS HOOD	HOOD	1
4	HINGE	PIANO HINGE	1
5	CAM LOCK	STRAIGHT CAM	1
6	GASKET SIDE	3/8" X .150 WEATHERSTRIPPING	2
7	GASKET TOP	3/8" X .150 WEATHERSTRIPPING	1
8	--	6-32 PAN HEAD SCREW	4
9	--	6-32 EXTERNAL TOOTH LOCK NUT	4
10	--	8-32 HEX DRIVE FLAT HEAD SCREW	4

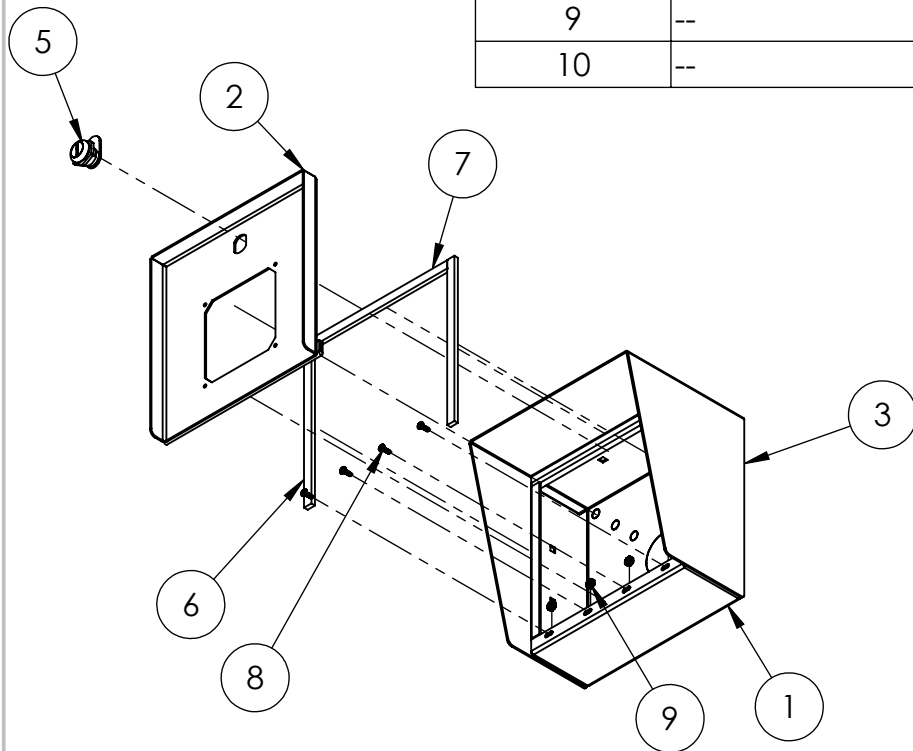

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

	NAME	DATE
DRAWN		
CHECKED		

TITLE:

ASSEMBLY

	SIZE A	PART NO. 88HOU-VIKI-01-CRS	REV C
WEIGHT: 7.838	NO SCALE	SHEET 2 OF 6	