

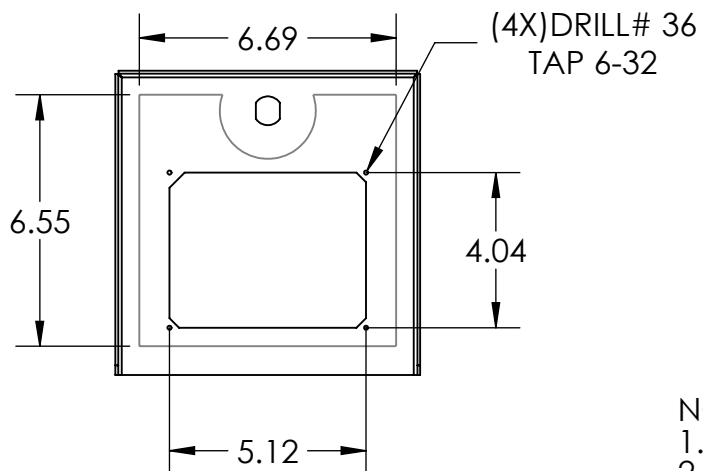
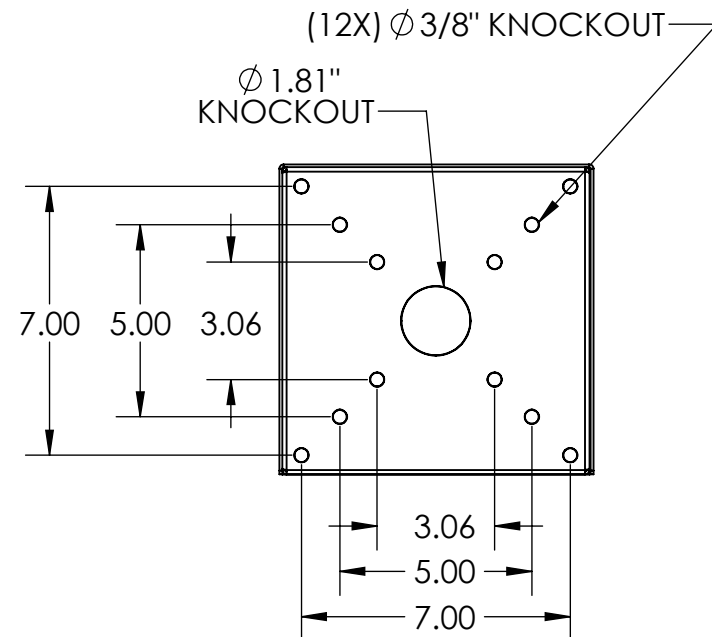
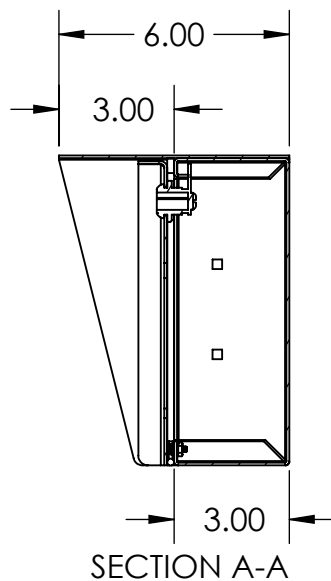


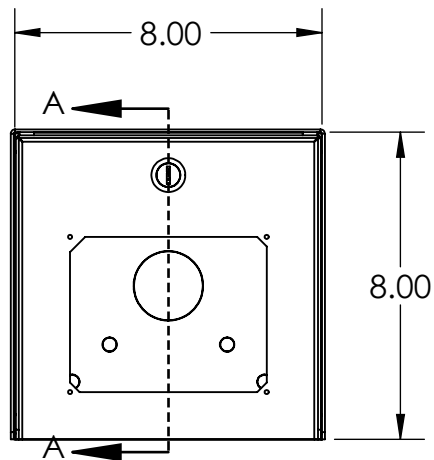

CUTOUT FITS VIKING:

K-1700-3, K-1700-3-BN, K-1700-3-BN-EWP
 K-1700-3-EWP, K-1700-BN-IP, K-1700-BN-IPEWP
 K-1700-IP, K-1700-IP-EWP, K-1705-3
 K-1705-3-BN, K-1705-3-BN-EWP, K-1705-3-EWP
 K-1705-BN-IP, K-1705-BN-IPEWP, K-1705-IP
 K-1705-IP-EWP, K-1770-3, K-1770-3-BN, K-1770-3-BN-EWP
 K-1770-3-EWP, K-1770-BN-IP, K-1770-BN-IPEWP
 K-1770-IP, K-1770-IP-EWP, K-1775-3, K-1775-3-BN
 K-1775-3-BN-EWP, K-1775-3-EWP, K-1775-BN-IP
 K-1775-BN-IPEWP, K-1775-IP, K-1775-IP-EWP

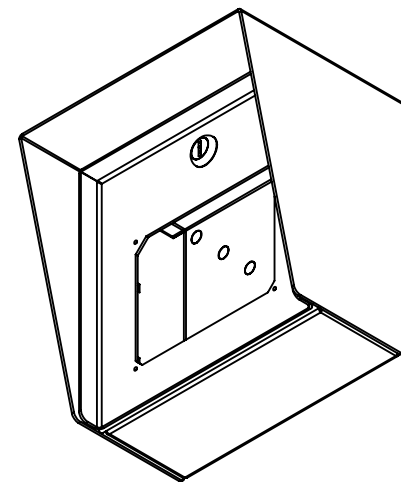

NOTES:

1. MATERIAL OF CONSTRUCTION IS MILD STEEL.
2. 2-4 MILS BLACK WRINKLE POWDER COAT. (8017-91612)

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL $\pm 1/32$
 ANGULAR: $\pm 2^\circ$
 TWO PLACE DECIMAL ± 0.010
 THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
 TOLERANCING PER:
 ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE
A

PART NO.
 88HOU-VIKI-03-CRS


REV
C

WEIGHT: 7.680

NO SCALE

SHEET 1 OF 6

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	88HOU-VIKI-03-CRS ENCLOSURE	ENCLOSURE WELDMENT	1
2	88HOU-VIKI-03-CRS DOOR	DOOR WELDMENT	1
3	88HOU-VIKI-03-CRS HOOD	HOOD	1
4	HINGE	PIANO HINGE	1
5	CAM LOCK	STRAIGHT CAM	1
6	GASKET SIDE	3/8" X .150 WEATHERSTRIPPING	2
7	GASKET TOP	3/8" X .150 WEATHERSTRIPPING	1
8	--	6-32 PAN HEAD SCREW	4
9	--	6-32 EXTERNAL TOOTH LOCK NUT	4
10	--	8-32 HEX DRIVE FLAT HEAD SCREW	4

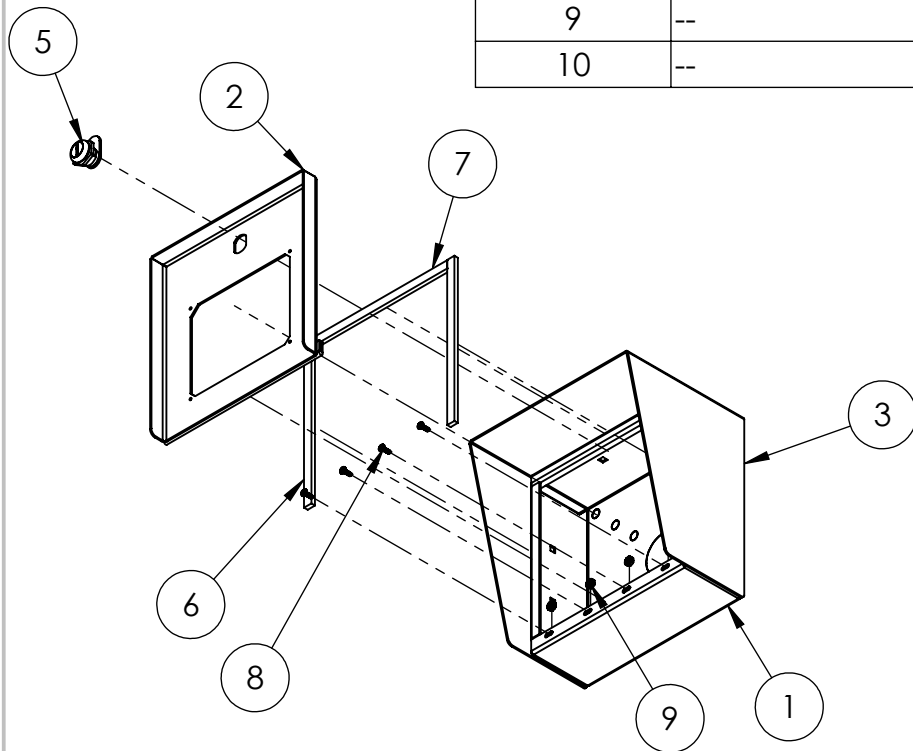

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

	NAME	DATE
DRAWN		
CHECKED		

TITLE:

ASSEMBLY

WEIGHT: 7.680

SIZE
A

PART NO.
88HOU-VIKI-03-CRS

REV
C

NO SCALE

SHEET 2 OF 6