


Ø 2.81

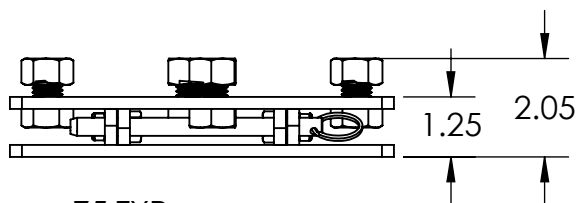

1.25


2.05

.75 TYP

8.00 TYP

6.44 TYP

5.73 TYP

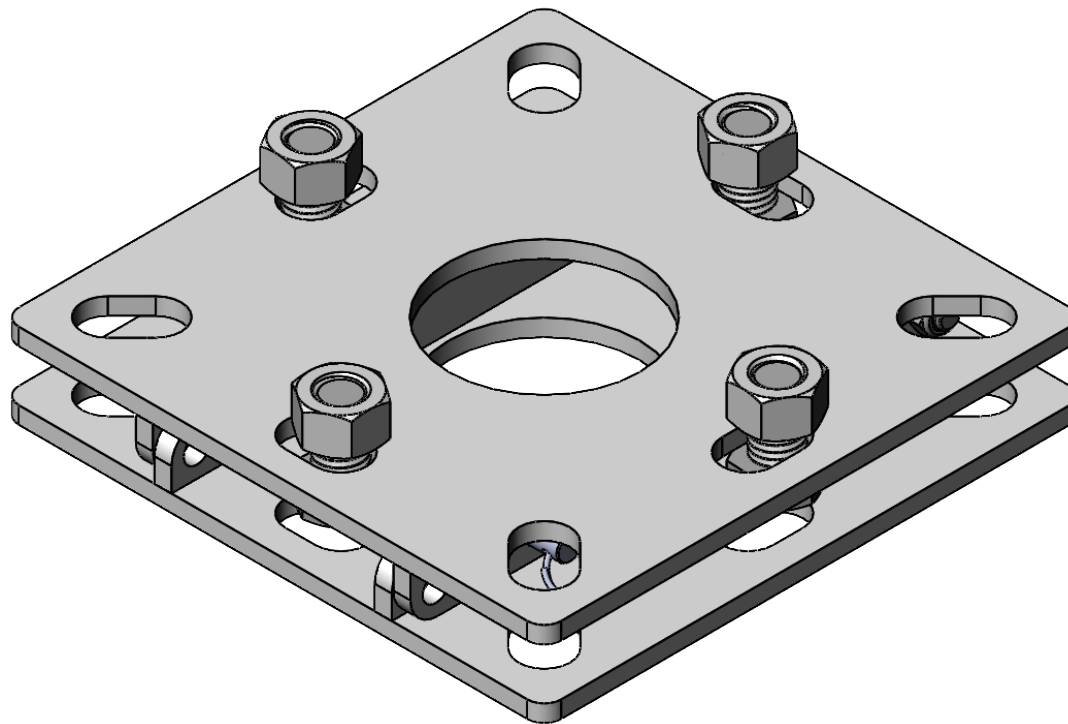

NOTES:

1. MATERIAL OF CONSTRUCTION IS MILD STEEL COATED IN 2-4 MILS BLACK WRINKLE POWDER COATING.
2. MOUNTS ON A STND 8" BASE PLATE AND BREAKS AWAY WHEN STUCK BY A VEHICLE.
3. TRIM BOLTS FLUSH TO THEIR NUT AFTER INSTALL.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE
A

PART NO.

88LAY-PRO-01-CRS


REV
0

WEIGHT: 8.996

NO SCALE

SHEET 1 OF 5

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	88LAY-PRO-01-CRS PLATE	PLATE	2
2	88LAY-PRO-01-CRS HINGE	HINGE	4
3	--	5/8-11 HEX NUT 18-8	4
4	--	5/8-11 HHCS 1" LONG	4
5	--	3/8-16 NYLON LOCKNUT	2
6	--	3/8-16 HHCS 7/8" LONG	2
7	--	QUICK RELEASE PIN 3/8" DIAM, 4-1/2" LONG	1

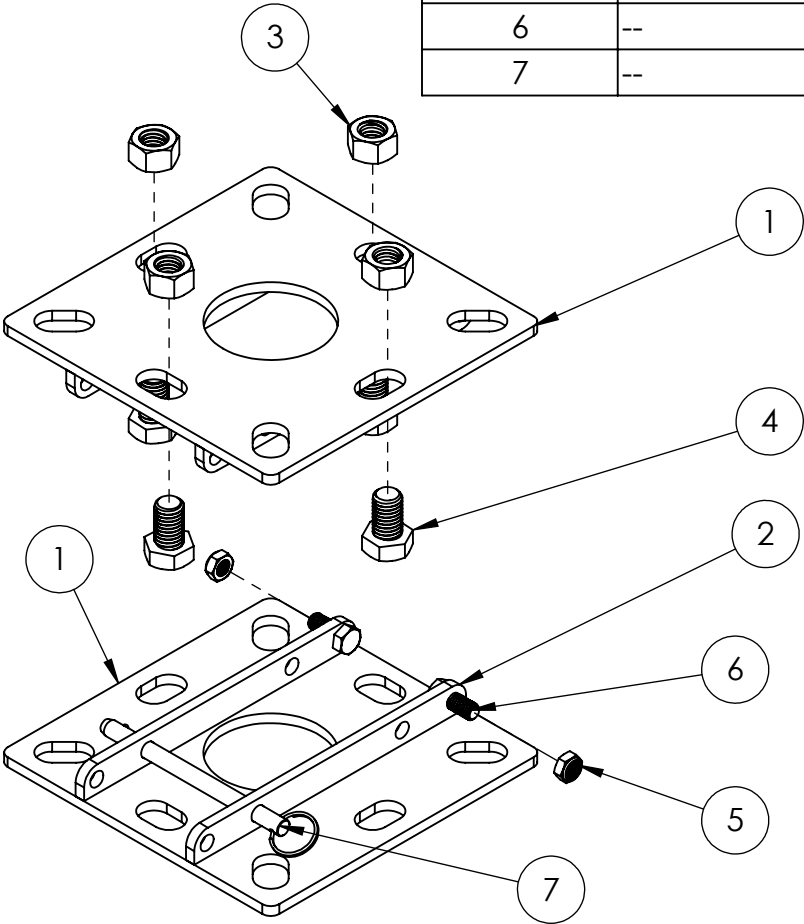

- NOTES:
1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
 2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ±1/32
ANGULAR: ±2°
TWO PLACE DECIMAL ±0.010
THREE PLACE DECIMAL ±0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

NAME	DATE
DRAWN	
CHECKED	

TITLE:
ASSEMBLY

SIZE A	PART NO. 88LAY-PRO-01-CRS	REV 0
WEIGHT: 8.996	NO SCALE	SHEET 2 OF 5