

NOTES:
1. MATERIAL OF CONSTRUCTION IS MILD STEEL COATED
IN 2-4 MILS BLACK WRINKLE POWDER COATING.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

DRAWN

CHECKED

NAME

DATE

TITLE:

INSTALLATION

SIZE
A

PART NO.
95HOO-DOOR-01-CRS


REV
A

WEIGHT: 5.532

NO SCALE

SHEET 1 OF 6

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	95HOO-DOOR-01-CRS ENCLOSURE	DB D1812 ENCLOSURE	1
2	95HOO-DOOR-01-CRS HOOD	DB D1812 HOOD	1
3	95HOO-DOOR-01-CRS LATCH	DB 1812 CAM LATCH	1
4	--	6-32 X 3/8 SS PEM STUD	3

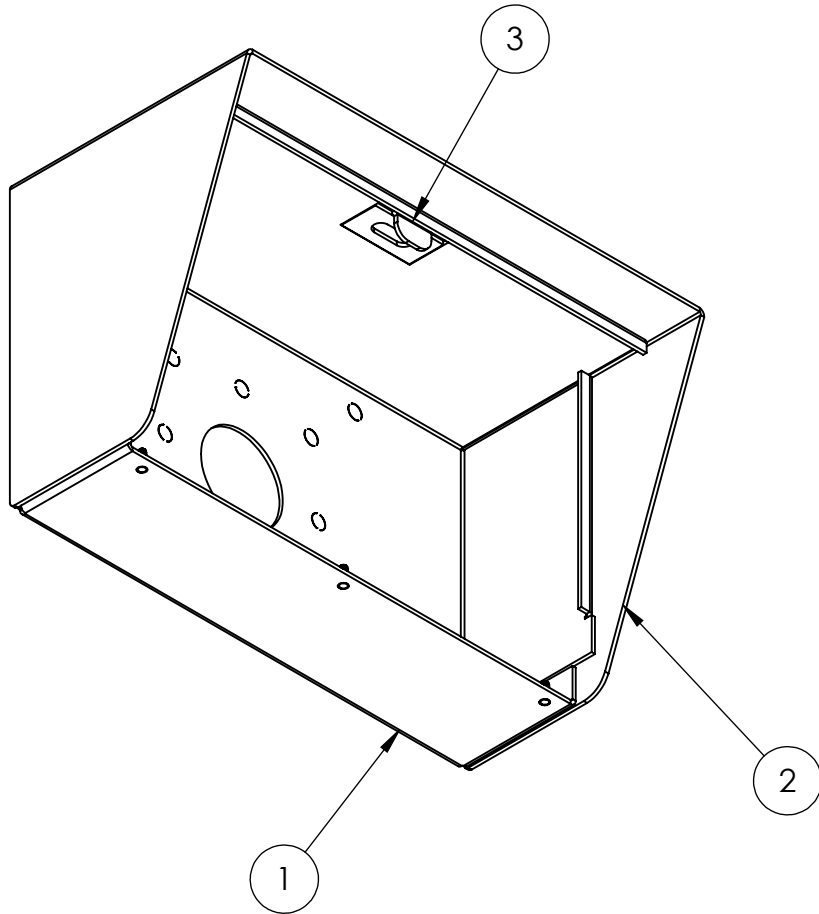

NOTES:

1. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
2. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

	NAME	DATE
DRAWN		
CHECKED		

TITLE:

ASSEMBLY

WEIGHT: 5.532

SIZE
A

PART NO.
95HOO-DOOR-01-CRS

REV
A

NO SCALE

SHEET 2 OF 6