


## NOTES:

- 1/2 Ø MOUNTING HARDWARE IS RECOMMENDED, STUD-ANCHOR-500 OR L-BOLT-500. COATED IN 2-4 MILS ANODIZED ALUMINUM COLOR POWDER
- 2. COATING.
- 3. \*ANODIZED COATING NOT AVAILABLE.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE:				
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN			INSTALLATION				
FRACTIONAL±1/32	CHECKED			INSTALLATION				
ANGULAR: ±2° TWO PLACE DECIMAL ±0.010	PROPRIETARY AND CONFIDENTIAL  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PEDESTALPRO LLC. ANY REPRODUCTION			Friday, May 29, 2020	SIZE	PART NO.		REV
THREE PLACE DECIMAL ±0.005				9:11:32 AM	<b>A</b> 55TOW-PRO-001-ALU		AIII	$\cap$
INTERPRET GEOMETRIC TOLFRANCING PFR:	IN PART OR AS A W WRITTEN PERMISSIO			7.11.02 / ((V)		001011110 001	, (20	
ASME Y14.5 -2009	IS PROHIBITED.		IALI KO LLC	WEIGHT: 12.262		NO SCALE	SHEET 1 C	OF 7

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	55TOW-PRO-001-ALU TUBE	6061 ALUM BODY	1
2	PLACAP-5-5-ALU	5 X 5 ALUM CAP PLATE	1
3	PLTACC-410	5" STND ACCESS PANEL	1
4	PLTBAS-5-5-ALU	5" STANDARD BASE PLATE	1
5		8-32 PAN HEAD SCREW	4

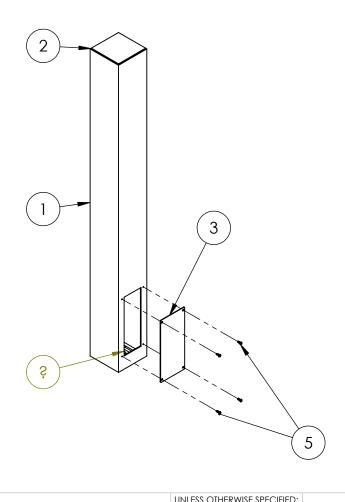

## NOTES:

- SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
  SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE:				
DIMENSIONS ARE IN INCHES	DRAWN			ASSEMBLY				
TOLERANCES: FRACTIONAL ± 1/32	CHECKED			ASSLIVIDET				
ANGULAR: ±2° TWO PLACE DECIMAL ±0.010 THREE PLACE DECIMAL ±0.005	PROPRIETARY AND CONFIDENTIAL  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PEDESTALPRO LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PEDESTALPRO LLC IS PROHIBITED.		IN THIS TY OF	Friday, May 29, 2020 9:11:32 AM	SIZE	PART NO. 55TOW-PRO-001-ALU		REV
INTERPRET GEOMETRIC			OUT THE	7.11.32 AM				
TOLERANCING PER: ASME Y14.5 -2009			IALPRO LLC	WEIGHT: 12.262	NO SCALE SHEET 2		SHEET 2 C	)F 7